



Steel Wire Rope

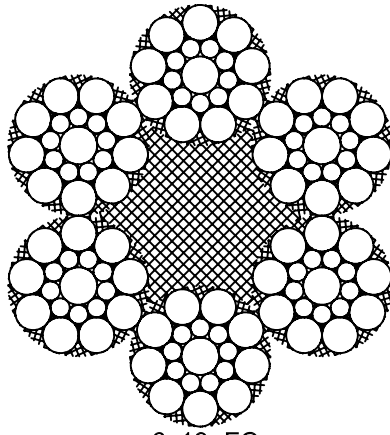

6x19+FC

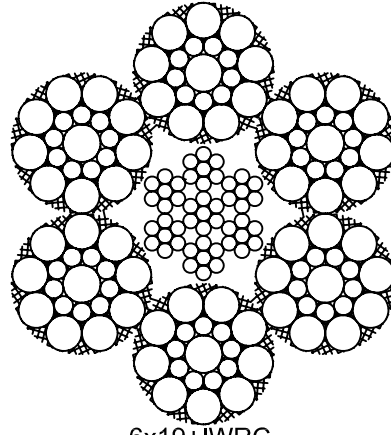

6x19+IWRC

Safety factor:BL equals 5x SWL

Standard:GB/T8918-1996

Finish: Electro-galvanized or Self-coloured

Diameter (mm)	Weight		Min.Breaking Strength(KN)							
	Kg/100m		1570MPA		1670MPA		1770MPA		1870MPA	
	FC	IWR	FC	IWR	FC	IWR	FC	IWR	FC	IWR
6	13.3	14.6	18.6	20.1	19.8	21.4	21.0	22.7	22.2	24.0
7	18.1	19.9	25.4	27.4	27.0	29.1	28.6	30.9	30.2	32.6
8	23.6	25.9	33.1	35.7	35.2	38.0	37.3	40.3	39.4	42.6
9	29.9	32.8	41.9	45.2	44.6	48.0	47.3	51.0	49.9	53.9
10	36.9	40.5	51.8	55.8	55.1	59.4	58.4	63.0	61.7	66.5
11	44.6	49.1	62.6	67.6	66.6	71.9	70.6	76.2	74.6	80.5
12	53.1	58.4	74.6	80.4	79.3	85.6	84.1	90.7	88.6	95.8
13	62.3	68.5	87.5	94.4	93.1	100	98.7	106	104	112
14	72.2	79.5	101	109	108	116	114	123	120	130
16	94.4	104	132	143	141	152	149	161	157	170
18	119	131	167	181	178	192	189	204	199	215
20	147	162	207	223	220	237	233	252	246	266
22	178	196	250	270	266	287	282	304	298	322
24	212	234	298	321	317	342	336	362	355	383
26	249	274	350	377	372	401	394	425	417	450
28	289	318	406	438	432	466	457	494	483	521
30	332	365	466	503	495	535	525	567	555	599
32	377	415	530	572	564	608	598	645	631	681
34	426	469	599	646	637	687	675	728	713	770
36	478	525	671	724	714	770	757	817	800	863