



Steel Wire Rope

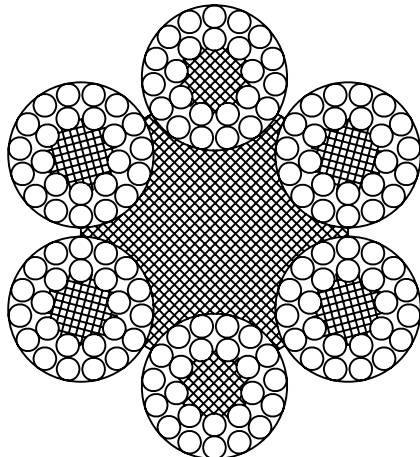

6x24+7FC

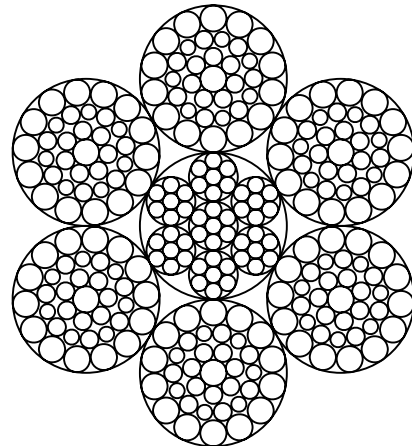

6x36WS+IWRC

Safety factor:BL equals 5x SWL

Standard:GB/T8918-1996

Finish: Electro-galvanized or Self-coloured

| 6x24+7FC | | | 6x36WS+IWRC | | |
|---------------|------------------|---------|---------------|------------------|---------|
| Diameter (mm) | Weight (Kg/100m) | B.L(KN) | Diameter (mm) | Weight (Kg/100m) | B.L(KN) |
| 6 | 10.9 | 16.8 | 12 | 60.2 | 85.6 |
| 8 | 19.5 | 29.9 | 13 | 70.6 | 100 |
| 9 | 24.6 | 37.8 | 14 | 81.9 | 116 |
| 10 | 30.4 | 46.7 | 16 | 107 | 152 |
| 11 | 36.8 | 56.5 | 18 | 135 | 192 |
| 12 | 43.8 | 67.3 | 20 | 167 | 237 |
| 13 | 51.4 | 79 | 22 | 202 | 287 |
| 14 | 59.6 | 91.6 | 24 | 241 | 342 |
| 16 | 77.8 | 119 | 26 | 283 | 401 |
| 18 | 98.5 | 151 | 28 | 328 | 466 |
| 20 | 122 | 187 | 30 | 376 | 535 |
| 22 | 147 | 226 | 32 | 428 | 608 |
| 24 | 175 | 269 | 34 | 483 | 687 |
| 26 | 206 | 316 | 36 | 542 | 770 |
| 28 | 238 | 366 | 38 | 604 | 858 |
| 30 | 274 | 420 | 40 | 669 | 951 |
| 32 | 311 | 478 | 42 | 737 | 1040 |
| 34 | 351 | 540 | 44 | 809 | 1150 |
| 36 | 394 | 606 | 46 | 884 | 1250 |
| 38 | 439 | 675 | 48 | 963 | 1360 |
| 40 | 486 | 748 | 50 | 1040 | 1480 |