



Steel Wire Rope

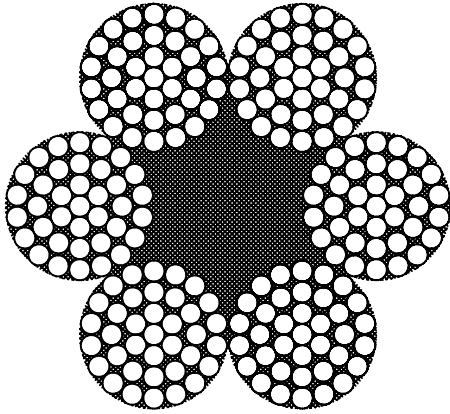

6x37+FC

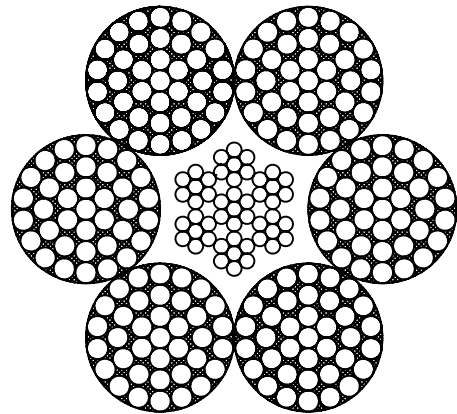

6x37+IWRC

Safety factor:BL equals 5x SWL

Standard:GB/T8918-1996

Finish: Electro-galvanized or Self-coloured

Diameter (mm)	Weight		Min.Breaking Strength(KN)							
	Kg/100m		1570MPA		1670MPA		1770MPA		1870MPA	
	FC	IWR	FC	IWR	FC	IWR	FC	IWR	FC	IWR
8	22.1	24.4	29.6	32.2	31.5	34	33.4	36.1	35.3	38.1
9	28.0	30.9	37.5	40.5	39.9	43.1	42.2	45.7	44.6	48.3
10	34.6	38.1	46.3	50	49.2	53.2	52.2	56.4	55.1	59.6
11	41.9	46.1	56.0	60.6	59.6	64.4	63.1	68.3	66.7	72.1
12	49.8	54.9	66.6	72.1	70.9	76.7	75.1	81.3	79.4	85.9
13	58.5	64.4	78.2	84.6	83.2	90	88.2	95.4	93.2	100
14	67.8	74.7	90	98.1	96.5	104	102	110	108	116
16	88.6	97.5	118	128	126	136	133	144	141	152
18	112	123	150	162	159	172	169	182	178	193
20	138	152	185	200	197	213	208	225	220	238
22	167	184	224	242	238	257	252	273	266	288
24	199	219	266	288	283	306	300	325	317	343
26	234	258	313	338	333	360	352	381	372	403
28	271	299	363	392	386	417	409	442	432	467
30	311	343	416	450	443	479	469	508	496	536
32	354	390	474	512	504	545	534	578	564	610
34	400	440	535	578	569	615	603	652	637	689
36	448	494	600	649	638	690	676	731	714	773
38	500	550	668	723	711	769	753	815	796	861
40	554	610	741	801	788	852	852	903	882	954