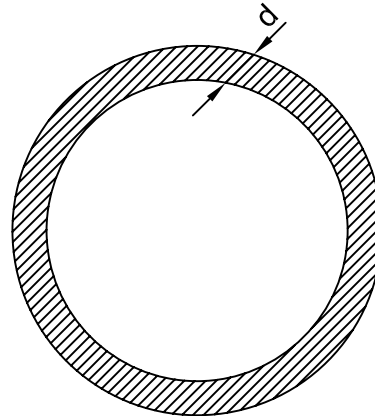





Wiresling Endless

Safety factor: BL equals 5x SWL
 Standard: GB/T8918-1996
 Finish: Galvanized
 Remarks: Other lengths upon request



6X36WS+IWRC

Diameter (mm)	Weight Kg/100m	B.L(KN)		
			 0<a<45	 45<a<90
28	273	559	1006	726
30	313	642	1155	834
33	402	824	1515	1071
36	452	924	1663	1201
38	503	1029	1852	1337
40	557	1141	2053	1483
42	614	1260	2268	1638
45	736	1512	2721	1965
48	802	1640	2952	2132
52	941	1932	3477	2511
54	1016	2076	3736	2698
58	1175	2400	4320	3120
60	1250	2568	4654	3338
66	1494	3111	5599	4044
72	1778	3702	6663	4812
78	2087	4345	7821	5648
84	2420	5033	9059	6542
95	3151	5581	10045	7255
108	4001	8330	14994	10829
120	4939	10284	18511	13369
132	5975	12443	22397	16175
144	7112	14808	26654	19250
155	8347	17379	31282	22592
168	9581	20156	36280	26202
180	11113	23138	41648	30079