


Lifting Chain

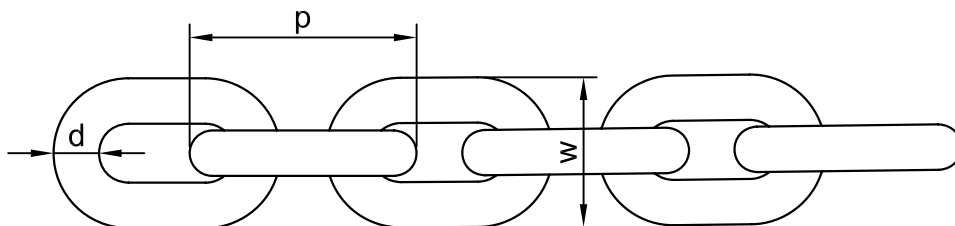

Safety factor:BL equals 4 x SWL

Materials:Alloy steel

Standard:ISO3077

Finish:Painted or Self color

d(mm)	w(mm)	p(mm)	S.W.L(KN)	P.L(KN)	B.L(KN)
5	17	25	8	15.8	31.6
5.6	19	28.2	10	19.8	39.6
6.3	21	31.6	12.5	25	50
7.1	23	35.2	16	31.7	63.1
8	26	40	20	40.3	80.6
9	30	45	25	51	102
10	33	50	32	63	126
11.2	37	56.4	40	79	158
12.5	41	63	50	99	198
14	46	70	63	124	248
16	52	80	80	161	322
18	59	90	100	204	408
20	65	100	125	252	504