


Wire Rope Sling

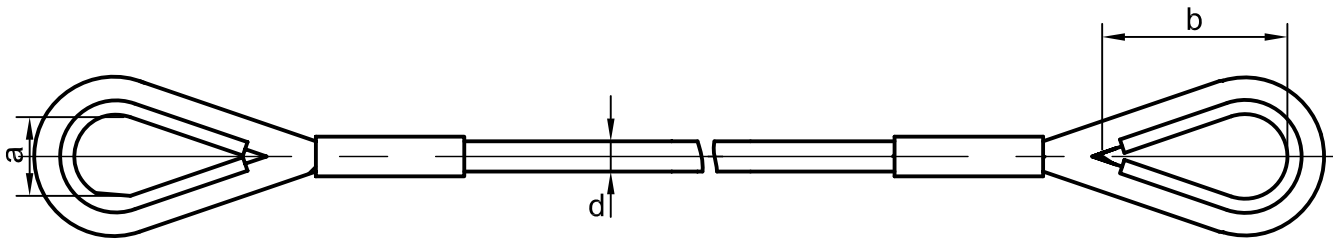

Safety factor: BL equals 5x SWL

Standard: GB/T8918-1996

Finish: Electro-galvanized or Self-coloured

6x19				6x37			
d(mm)	a(mm)	b(mm)	S.W.L(t)	d(mm)	a(mm)	b(mm)	S.W.L(t)
3	40	80	0.08	6	75	150	0.3
4	50	100	0.14	7	75	150	0.4
5	65	130	0.2	8	100	200	0.5
6	75	150	0.3	9	100	200	0.7
7	75	150	0.4	10	100	200	0.8
8	100	200	0.6	11	115	230	1.0
9	100	200	0.7	12	115	230	1.2
10	100	200	0.9	13	125	250	1.4
11	115	230	1.0	14	125	250	1.6
12	115	230	1.3	16	150	300	2.2
13	115	230	1.5	18	150	300	2.7
14	125	250	1.7	20	175	350	3.3
16	150	300	2.2	22	175	350	4.1
18	150	300	2.8	24	225	450	5.0
20	175	350	3.5	26	225	450	6.0
22	175	350	4.2	28	250	500	7.0
24	225	450	5.0	30	250	500	8.0
26	225	450	6.0	32	275	550	9.0
28	250	500	7.0	34	300	600	10.0
30	250	500	8.0	36	300	600	11.0
32	275	550	9.0	38	300	600	12.0
34	300	600	10.0	40	350	700	13.5
36	300	600	11.0	42	400	800	15.0
38	300	600	13.0	44	400	800	16.0
40	350	700	14.0	46	450	900	17.0
42	400	800	15.0	48	450	900	18.0
44	400	800	17.0	50	500	1000	21.0
46	450	900	18.0	52	500	1000	23.0