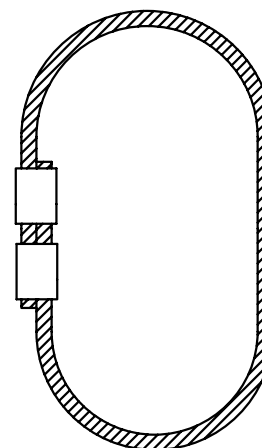





Grommet with alu clamp



6X36WS+IWRC

Safety factor: BL equals 5x SWL
 Standard: GB/T8918-1996
 Finish: Electro-galvanized or Self-coloured
 Remarks: Other lengths upon request

| Diameter (mm) | Weight Kg/100m | B.L(KN) | | |
|------------------|-------------------|---|--|--|
| | |  |  0<a<45 |  45<a<90 |
| 16 | 107 | 152 | 273 | 197 |
| 18 | 135 | 192 | 345 | 249 |
| 20 | 167 | 237 | 427 | 308 |
| 22 | 202 | 287 | 516 | 373 |
| 24 | 241 | 342 | 615 | 444 |
| 26 | 283 | 401 | 721 | 1483 |
| 28 | 328 | 466 | 838 | 605 |
| 30 | 376 | 535 | 963 | 695 |
| 32 | 428 | 608 | 1094 | 790 |
| 34 | 483 | 687 | 1236 | 893 |
| 36 | 542 | 770 | 1386 | 1001 |
| 38 | 604 | 858 | 1544 | 1115 |
| 40 | 699 | 951 | 1711 | 1236 |
| 42 | 737 | 1040 | 1872 | 1352 |
| 44 | 809 | 1150 | 2070 | 1495 |
| 46 | 884 | 1250 | 2250 | 1625 |
| 48 | 963 | 1360 | 2448 | 1768 |
| 50 | 1040 | 1480 | 2664 | 1924 |
| 52 | 1130 | 1600 | 2880 | 2080 |
| 54 | 1220 | 1730 | 3114 | 2249 |
| 56 | 1310 | 1860 | 3348 | 2418 |
| 58 | 1410 | 1990 | 3420 | 2587 |
| 60 | 1500 | 2140 | 3852 | 2782 |
| 62 | 1610 | 2280 | 4104 | 2964 |
| 64 | 1710 | 2430 | 4374 | 3159 |