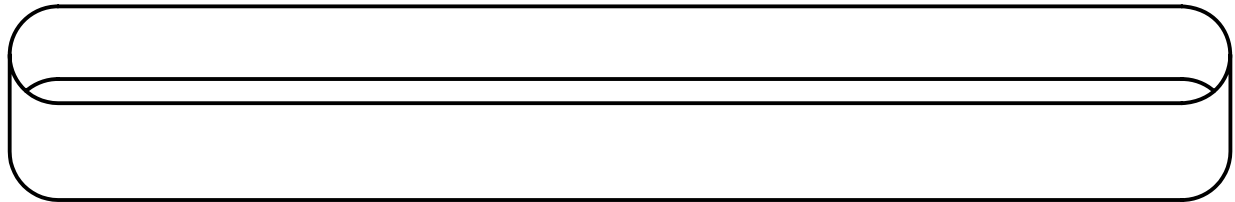







Endless Webbing Sling



层数	型号	宽度 (安全系数为6)	工作载荷 (t)	起吊方式				
				垂直 	锁吊 	吊篮		
						$a < 7^\circ$ 	$a < 45^\circ$ 	$45^\circ < a < 60^\circ$ 
M=1	M=0.8	M=2	M=1.4	M=1				
单层	SEN010	25/38	1	1	0.8	2	1.4	1
	SEN020	50	2	2	1.6	4	2.8	2
	SEN030	75	3	3	2.4	6	4.2	3
	SEN040	100	4	4	3.2	8	5.6	4
	SEN050	125	5	5	4.0	10	7.0	5
	SEN060	150	6	6	4.8	12	8.4	6
	SEN080	200	8	8	6.4	16	11.2	8
SEN100	250	10	10	8.0	20	14.0	10	
双层	DEN020	25/38	2	2	1.6	4	2.8	2
	DEN040	50	4	4	3.2	8	5.6	4
	DEN060	75	6	6	4.8	12	8.4	6
	DEN080	100	8	8	6.4	16	11.2	8
	DEN100	125	10	10	8.0	20	14.0	10
	DEN120	150	12	12	9.6	24	16.8	12
	DEN160	200	16	16	12.8	32	22.4	16
	DEN200	250	20	20	16.0	40	28.0	20
DEN240	300	24	24	19.2	48	33.6	24	
三层	TEN030	25/38	3	3	2.4	6	4.2	3
	TEN060	50	6	6	4.8	12	8.4	6
	TEN090	75	9	9	7.2	18	12.6	9
	TEN120	100	12	12	9.6	24	16.8	12
	TEN150	125	15	15	12.0	30	21.0	15
	TEN180	150	18	18	14.4	36	25.2	18
	TEN240	200	24	24	19.2	48	33.6	24
	TEN300	250	30	30	24.0	60	42.0	30
TEN360	300	36	36	28.8	72	50.4	36	
四层	FEN040	25/38	4	4	3.2	8	5.6	4
	FEN080	50	8	8	6.4	16	11.2	8
	FEN120	75	12	12	9.6	24	16.8	12
	FEN160	100	16	16	12.8	32	22.4	16
	FEN200	125	20	20	16.0	40	28.0	20
	FEN240	150	24	24	19.2	48	33.6	24
	FEN320	200	32	32	25.6	64	44.8	32
	FEN400	250	40	40	32.0	80	56.0	40
FEN480	300	48	48	38.4	96	67.2	48	